

Size:3_M58

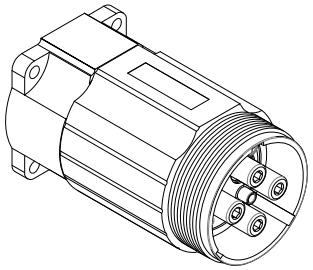

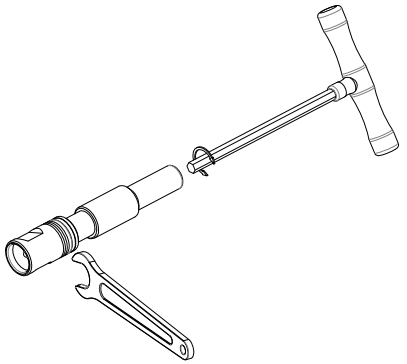

021.000.1009_958 Series

Technical data

screw contact: male

contact: copper-zinc alloy(CuZn)

contact plating: gold-plated

temperature range: -40℃~+110℃

nominal current: 150A

cross section : 10/16/25/35 mm²

021.000.2009_958 Series

Technical data

screw contact: female

contact: copper-zinc alloy(CuZn)

contact plating: gold-plated

temperature range: -40℃~+110℃

nominal current: 150A

cross section : 10/16/25/35 mm²

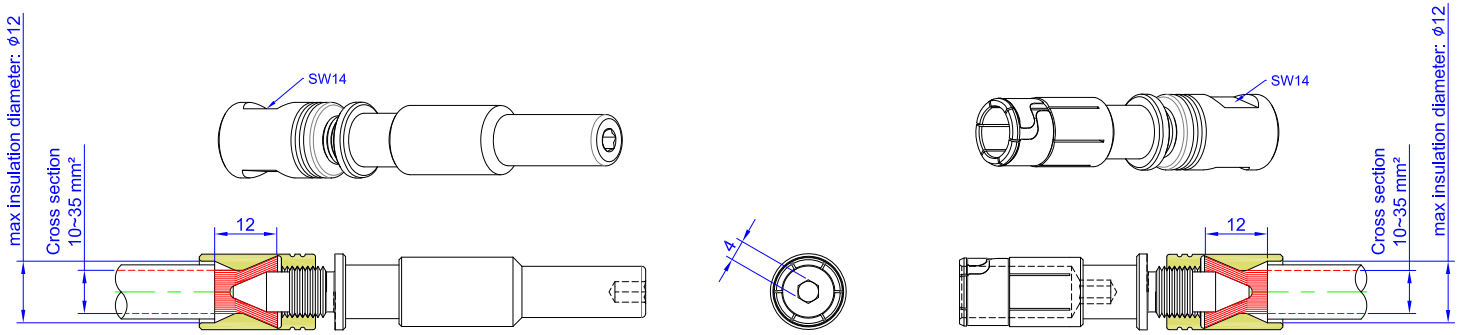

MODULAR CONNECTOR SYSTEMS

958 series contact , screw type 150A

P4A-D-CU-2017-150A

Special cable & modular connector Application in Drive Technology

AIRELECTRIC CO.,LTD.

DO NOT SCALE DRAWING

	NAME:	DATE:
DESIGN	Tin	2017.02.15
DRAWN	Tin	2017.02.15
CHECKED	Leana	2017.02.15
Q.A.	Kever	2017.02.15

TITLE:

DEG NO.

SCALE: 1:3

SHEET 1 OF 1

REV: G1

A3 - ASSEMBLY

concentricity tolerance ±0.15

angle ±0.5°

basic tolerance

>0	±0.05
>6	±0.1
>30	±0.15
>120	±0.2
>400	±0.3
>1000	±0.5

REV:	REVISION DESCRIPTION	NAME	REV DATE
5			
4			
3			
2			
1			