

## Features(特色)

Ideal for connecting identical and different conductor cross-sections

非常適合連接相同和不同截面的導線

Reusable and disassembled

可重複使用和拆卸

Easily by with 2 screws

用 2 個螺絲即可輕鬆鎖緊

Material: copper conductor body

材 質: 銅導體本體

Surface: gold-plated


表 面: 鍍金

RoHS



SCREW CONNECTORS SPEC									
ITEM	Part no.	A1		A2		OD mm	L1 mm	W3F2 L2/mm	Remark
		cable end-sleeves/mm <sup>2</sup>	25~35	cable end-sleeves/mm <sup>2</sup>	16~25				
1	3525AT	35	25~35	25	16~25	16	36	50	old-stock
2	3525AT	35	25~35	25	16~25	14	24	40	new
3	3535AT	35	25~35	35	25~35	16	36	50	a'ss
4	2516AT	25	16~25	16	10~16	14	30	45	old-stock
5	2516AT	25	16~25	16	10~16	12	24	40	new
6	2525AT	25	16~25	25	16~25	14	30	45	a'ss
7	1616AT	16	10~16	16	10~16	10	24	40	stock
8	1610AT	16	10~16	10	6~10	10	24	40	stock
9	1010AT	10	6~10	10	6~10	8	24	40	a'ss
10	1006AT	10	6~10	6	4~6	8	24	40	stock
11	0606AT	6	4~6	6	4~6	8	24		new

## Screw connectors option & Application

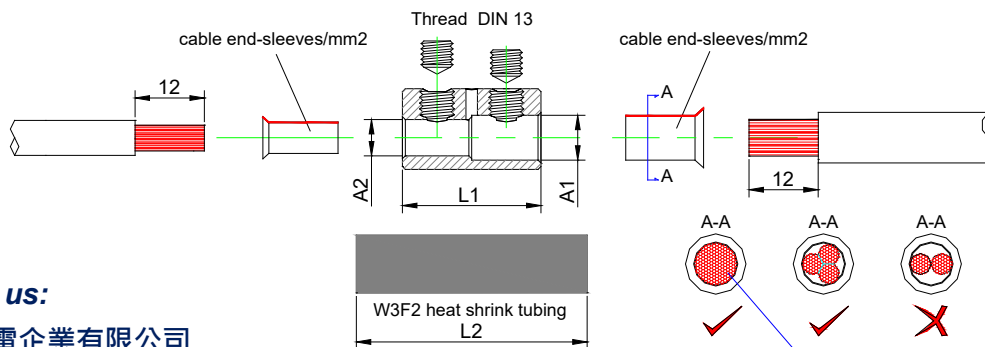

### Contact us:

**AE** 航電企業有限公司

台中市西屯區安和一街158號

TEL:886-4-2465-1618

FAX:886-4-2217-5170

http://airelectric.weebly.com

E-mail:Air\_Gary@outlook.com

[SUMITUBE@W3F2\\_Description](#)

Wire cors section  $85\% \geq$  cable end-sleeves/mm<sup>2</sup>